



MASTER PL-C 2 Pin

MASTER PL-C 10W/830/2P 1CT/5X10BOX

Energy-saving compact fluorescent lamps; Compact long-arc low-pressure mercury discharge lamp; Envelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap base	G24D-1 [G24d-1]
Life to 10% failures (nom.)	6500 h
Life to 50% failures (nom.)	10000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	92 %
LSF 8000 h Rated	78 %
	Sphere
Light technical	
Colour Code	830 [CCT of 3,000 K]
Lamp Luminous Flux 25°C EL (Nom)	600 lm
Lamp Luminous Flux (Nom)	600 lm
Colour Designation	Warm white (WW)
Chromaticity coordinate X (nom.)	0.44

Chromaticity coordinate Y (nom.)	0.403
Colour Temperature, horizontal (Nom)	3000 K
Lamp Luminous Efficacy EM (Nom)	60 lm/W
Colour Rendering Index, horiz (Nom)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	83 %
LLMF 8000 h Rated	81 %

Operating and electrical

Power (Rated) (Nom)	10.4 W
Lamp current (nom.)	0.190 A

Temperature

Design temperature (nom.)	28 °C
---------------------------	-------

MASTER PL-C 2 Pin

Controls and dimming

Dimmable	No
----------	----

Mechanical and housing

Cap-base information	2P
----------------------	----


Approval and application

Energy Efficiency Class	G
Mercury (Hg) content (max.)	1.4 mg
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	11 kWh
	423274

Product data

Full product code	871150070724670
Order product name	MASTER PL-C 10W/830/2P 1CT/5X10BOX
EAN/UPC – product	8711500707246
Order code	927903883040
SAP numerator – quantity per pack	1
Numerator – packs per outer box	50
SAP material	927903883040
ILCOS code	FSQ-10/30/1B-I-G24d-1


Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 10W/830/2P 1CT/5X10BOX	27.1 mm	27.1 mm	75.5 mm	95.0 mm	117.4 mm

MASTER PL-C 10W/830/2P 1CT/5X10BOX

Photometric data

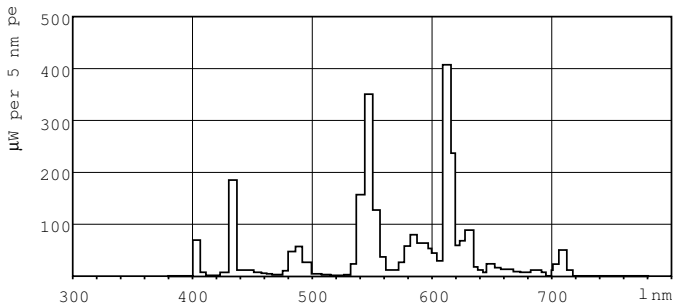

Lightcolour /830

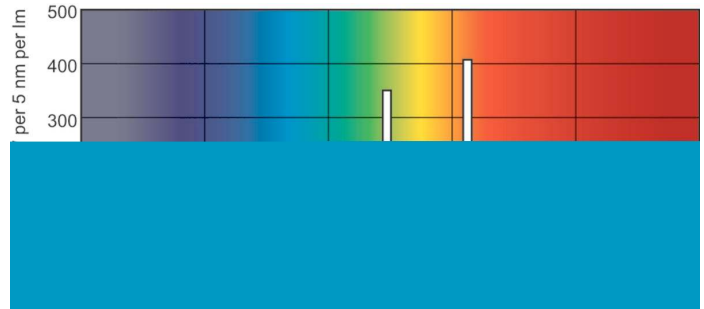

Lightcolour /830

MASTER PL-C 2 Pin

Lifetime



LDLE_PLC2P_0001-Life expectancy diagram

LDLE_PLC2P_0002-Life expectancy diagram



LDLM_PLC2P_0001-Lumen maintenance diagram

