



TL-E LIFEMAX

Standard Colours

TL-E 40W/54-765 1CT/20

This circular TL lamp (tube diameter 29 mm) enables omni-directional light distribution. It is suitable for use in a wide range of luminaires for various purposes where color rendering is not important.


Product data

General Information	
Cap base	G10Q [G10q]
Life to 50% failures (nom.)	13000 h
Light Technical	
Colour Code	54-765
Lamp Luminous Flux 25°C EL (Nom)	2500 lm
Colour Designation	Cool Daylight
Lumen maintenance 10,000 hours (nom.)	73 %
Lumen maintenance 2,000 hours (nom.)	87 %
Lumen maintenance 5,000 hours (nom.)	78 %
Colour Temperature, horizontal (Nom)	6200 K
Lamp Luminous Efficacy EM (Nom)	62 lm/W
Colour Rendering Index, horiz (Nom)	72
Operating and Electrical	
Power (Rated) (Nom)	40.0 W
Lamp current (nom.)	0.420 A
Voltage (Nom)	110 V
Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb shape	C-T9 [C-T 29 mm (C-T9)]
Approval and Application	
Mercury (Hg) content (nom.)	9 mg
Product Data	
Full product code	871150055991301
Order product name	TL-E 40W/54-765 1CT/20
EAN/UPC – product	8711500559913
Order code	928027405436
SAP numerator – quantity per pack	1
Numerator – packs per outer box	20
SAP material	928027405436
SAP net weight (piece)	0.250 kg
ILCOS code	FSC-40/62/2A-E-G10q-29/400

TL-E LIFEMAX Standard Colours


Dimensional drawing

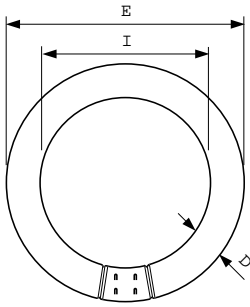


Product	D (max)	D (min)	E (min)	E (max)	I (min)	I (max)
TL-E 40W/ 54-765 1CT/20	30.9 mm	27.1 mm	393.7 mm	406.4 mm	341.0 mm	347.7 mm

TL-E 40W/54-765

Photometric data

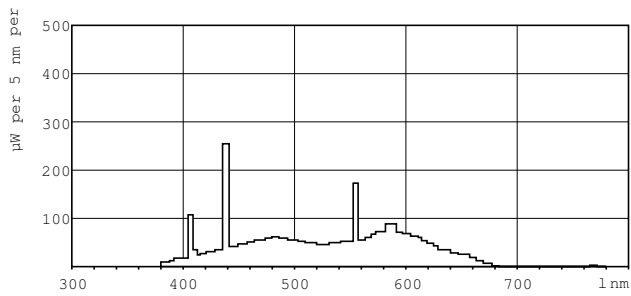

Lightcolour /54-765

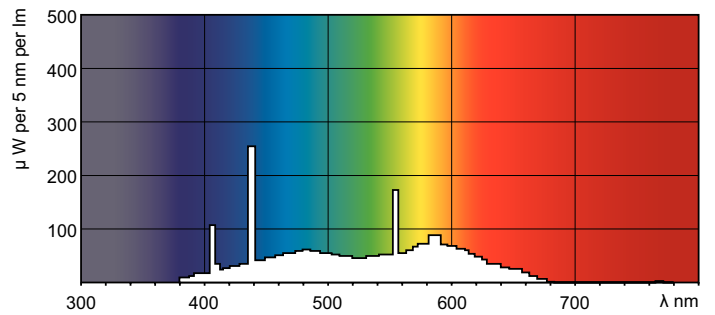

Lightcolour /54-765

