



Truefashion Projector GCGM

RS700B LED30 930PW PSU NB WH

Lens

The Truefashion Projector is targeted towards the mid-high-end retail segment with an attractive outlook design, excellent quality of light and dedicated light recipes, as well as system connectivity, in order to create a comfortable ambience and impressive shopping experience to stimulate sales for retail customers.

Warnings and Safety

- 3 years

Product data

General Information		Controls and Dimming	
Lamp colour code	930 warm white	Dimmable	No
Optical cover/lens type	Lens	Mechanical and Housing	
Control interface	-	Housing material	Aluminium
Protection class IEC	Safety class II (II)	Optical cover/lens material	Polymethyl methacrylate
CE mark	CE mark	Optical cover/lens finish	-
Number of products on MCB (16 A type B)	1	Overall height	100 mm
LED engine type	LED	Overall diameter	111 mm
Operating and Electrical		Colour	White RAL 9003
Input Voltage	220 to 240 V	Approval and Application	
Input frequency	50 or 60 Hz	Ingress protection code	IP20 [Finger-protected]
Power factor (min.)	0.95	Mech. impact protection code	-

Truefashion Projector GCGM

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	2879 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	93 lm/W
Lamp colour temperature	3000 K
Colour Rendering Index	>90
Initial input power	31 W
Power consumption tolerance	+/-10%

Application Conditions


Ambient temperature range	-15 to +35 °C
---------------------------	---------------

Product Data

Full product code	911401520671
Order product name	RS700B LED30 930PW PSU NB WH
Order code	911401520671
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12 NC)	911401520671
SAP net weight (piece)	0.630 kg



Dimensional drawing

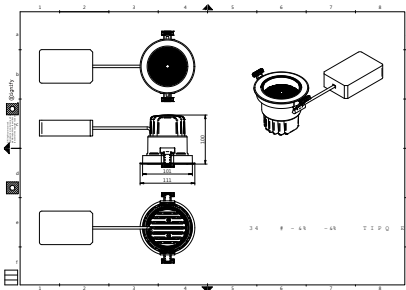

Spotlight/ projector LED

